



MEETS
OSHA
REQUIREMENTS

EXTENSION LADDERS


ALUMINUM

- Type 1A 300 lb Rating
- Type 1 250 lb Rating


| Size | lb. Type 1A | lb. Type 1 |
|------|-------------|------------|
| 16' | 35 | 25 |
| 20' | 42 | 30 |
| 24' | 48 | 35 |
| 28' | 55 | 50 |
| 32' | 62 | 57 |
| 36' | 68 | 65 |
| 40' | 75 | 72 |

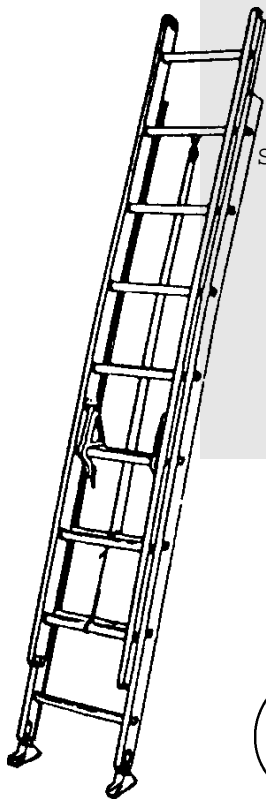

"D" Rung



Pulley Assembly



Slide Guide



Rung Lock





Swivel Safety Shoes


FIBERGLASS

- Type 1A Orange XHD 300# Rating
- Type 1A Yellow HD 300# Rating


| Size | lb. Type 1A Orange | lb. Type 1A Yellow |
|------|--------------------|--------------------|
| 16' | 37 | 35 |
| 20' | 45 | 43 |
| 24' | 53 | 50 |
| 28' | 61 | 57 |
| 32' | 71 | 68 |
| 36' | 102 | 76 |
| 40' | 110 | 83 |

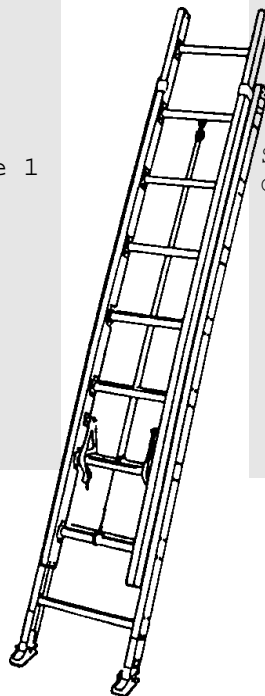

"D" Rung



Pulley Assembly



Slide Guide



Rung Lock




Swivel Safety Shoes

WOOD

- Type 1A 300 lb Rating


| Size | lb. |
|------|-----|
| 16' | 33 |
| 20' | 42 |
| 24' | 50 |
| 28' | 66 |
| 32' | 75 |
| 36' | 88 |
| 40' | 98 |

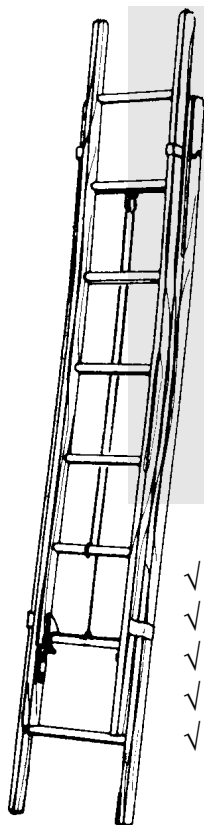

- ✓ Made of quality ladder stock
- ✓ Easy to operate rung locks
- ✓ 4 zinc plated slide guides
- ✓ Rope & pulley
- ✓ -1/8" rungs

Length Chart

| Height to Eaves | Buy this Length Ext. Ladder | Max. Working Length |
|-------------------------|-----------------------------|---------------------|
| to 9-1/2' Max. | 16' | 13' |
| from 9-1/2' to 13-1/2' | 20' | 17' |
| from 13-1/2' to 17-1/2' | 24' | 21' |
| from 17-1/2' to 21-1/2' | 28' | 25' |
| from 21-1/2' to 25' | 32' | 29' |
| from 25' to 28' | 36' | 32' |
| from 28' to 31' | 40' | 35' |

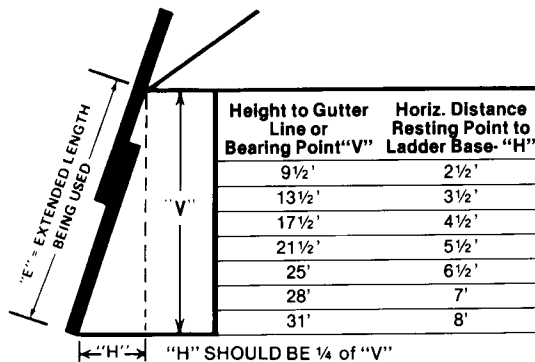

CALL ON OUR EXPERTISE FOR THOSE "HARD TO FIND" ITEMS !!